

# rekor HD

2MP 1080P HD BULLET / DOME CCTV CAMERA




REKHDC36FBG18P ▪ REKHDC36FBW18P  
REKHDC36FDG18P ▪ REKHDC36FDW18P

USER MANUAL



# DVR CONNECTION DIAGRAM

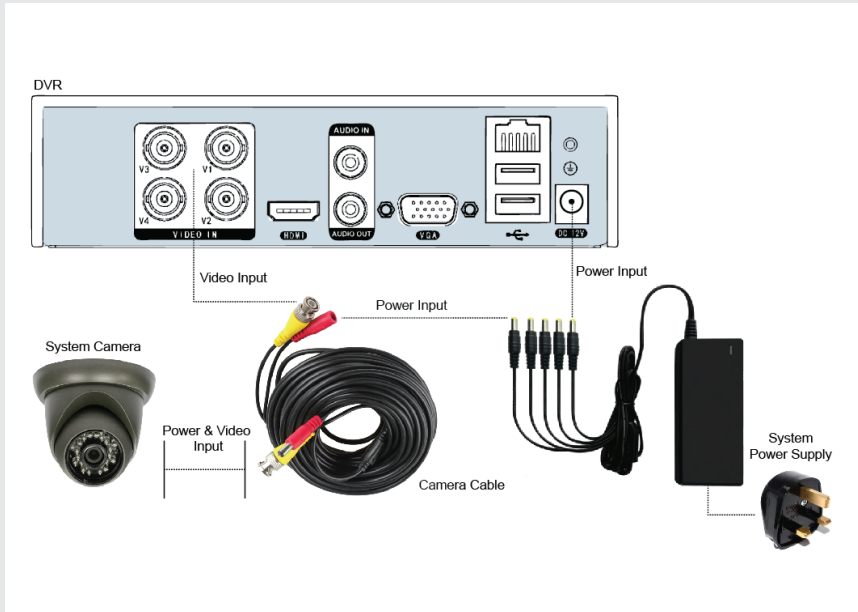

NB. The Video & Power connectors are not weatherproof.  
Please ensure the connections are made internally, or housed in a suitable enclosure.



**REKHDC36FBG18P    REKHDC36FBW18P**

**Camera**

Image Sensor	1/2.7" F22 CMOS Sensor
Signal System	NTSC/PAL
Effective Pixels	1920(H) x 1080(V)
Electronic Shutter	AUTO/ 1/50 (1/60) -1/50,000sec
Synchronization	Internal
Min. Illumination	0.1Lux
Video Frame Rate	PAL/NTSC:25/30fps

**Camera Features**

S/N Ratio	>41dB
Noise Reduction	2DNR
Day&Night	Auto
White Balance	Auto
AGC	Auto
IR LED	5X24PCS IR LED
IR Range	Up to 20m

**Lens**

Focal Length	3.6mm fixed lens
Angle of View	H: 80°
Lens Type	Fixed Iris
Mount Type	M12

**General**

IP Rating	IP66
Casing	Plastic
Power Supply	DC12V(+/-10%)
Power Consumption	200mA (IR On)
Working Temperature / Humidity	-20~+50° RH95% MAX
Dimensions (W x D x H)	121(W) x 71(H) x 61(D)
Weight	200g



**REKHDC36FDG18P    REKHDC36FDW18P**

**Camera**

Image Sensor	1/2.7" F22 CMOS Sensor
Signal System	NTSC/PAL
Effective Pixels	1920(H) x 1080(V)
Electronic Shutter	AUTO/ 1/50 (1/60) -1/50,000sec
Synchronization	Internal
Min. Illumination	0.1Lux
Video Frame Rate	PAL/NTSC:25/30fps

**Camera Features**

S/N Ratio	>41dB
Noise Reduction	2DNR
Day&Night	Auto
White Balance	Auto
AGC	Auto
IR LED	5X24PCS IR LED
IR Range	Up to 20m

**Lens**

Focal Length	3.6mm fixed lens
Angle of View	H: 80°
Lens Type	Fixed Iris
Mount Type	M12

**General**

IP Rating	IP65
Casing	Metal Ball+Plastic Cover
Power Supply	DC12V(+/-10%)
Power Consumption	200mA (IR On)
Working Temperature / Humidity	-20~+50° RH95% MAX
Dimensions (W x D x H)	120(w)x 75(H)
Weight	230g



**Elite Security Products**

Unit 7, Target Park, Shawbank Rd  
Lakeside, Redditch B98 8YN



Telephone: 01527 51 51 50  
Fax: 01527 51 51 43  
email: info@esbuk.com