



www.espuk.com

Ceiling Light Instructions

Please read instructions carefully before commencing installation of this product.
The installation must be carried out by a qualified Electrician.

SPECIFICATION

1. Working temperature: -20°C - $+55^{\circ}\text{C}$
2. Supply Voltage: $\text{AC}240\text{V}\pm 10\%$ 50Hz
3. Outer Power: 18W Max(AC)&7.5W(DC)
4. IP Rating: IP65
5. Battery: 6V 1800mAh Ni-Cd
6. Duration: 3 hours

INSTALLATION

*Should be carried out by a competent electrician

Ensure the mains supply is switched off and there is at least 100mm of free space around the luminaire.
The luminaire should be mounted using the fixing holes provided, on a sound flat surface. Route the incoming cables around the outside of the body well away from the control gear, and make off the conductors in the gear tray mounted terminal block.

NOTE

Please refer to the interconnection diagram before connecting to mains supply, ensure that the mains 230V AC supply is connected as shown. A competent electrician should carry this out.


DO NOT CONNECT THE BATTERY THE WRONG WAY ROUND, EVEN MOMENTARILY.

Switch off mains supply before opening the light.

If Non-maintained operation is required, connect a permanent live supply to the L terminal only

CONNECTION DIAGRAM

Emergency operation

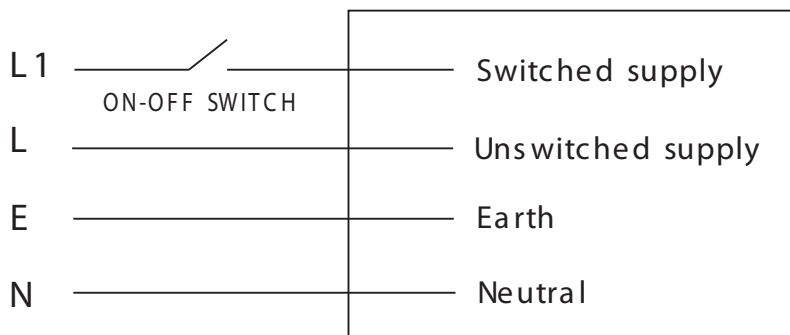

L1 is the transition switch for maintained mode if required.
L1 terminal not included on Mains Only model.