

INF-RX8

Hardwire wirefree interface unit

Enjoy the flexibility of wire free devices with the familiarity of your favourite hardwire panel



electronics line uk

www.espuke.com

INF-RX8

Hardwire wirefree interface unit

Quick installation times and a wide range of security and environmental devices make wire free systems very attractive. The downside is the installer has to learn the programming techniques for a new control panel. INF-RX8 allows the installer to stay with the hard wire system they recognise whilst enjoying all the benefits of a wire free installation.

FEATURES


- Status LED: Power loss, system trouble
- Two line LCD status display window
- Simple menu driven programming
- Integral signal strength meter
- Walk test facility
- Suitable for use with all hardwire alarm panels

OUTPUTS AND INPUTS

- 8 zones (1 device per zone)
- Option for set/unset zone (multiple keyfobs allowed)
- Option for panic/medical alert zone (multiple keyfobs allowed)
- Up to 16 keyfobs total per unit
- Tamper output - Tamper / jamming / signal loss
- Trouble output - low battery / power loss / supervision loss

TECHNICAL SPECIFICATION

- Dimensions: W123mm x H109mm x D27mm
- Operational transmission frequency 868mHZ
- Supports Electronic Line 868mHZ detection devices/keyfobs
- Operating voltage 9 to 15VDC
- Unit current: Standby 35mA max load 80mA
- Zone outputs rating @ 24 volt 50mA max (open collector) n/o fail safe mode
- Trouble outputs @ 24 volt 1 amp max
- 250m open field range

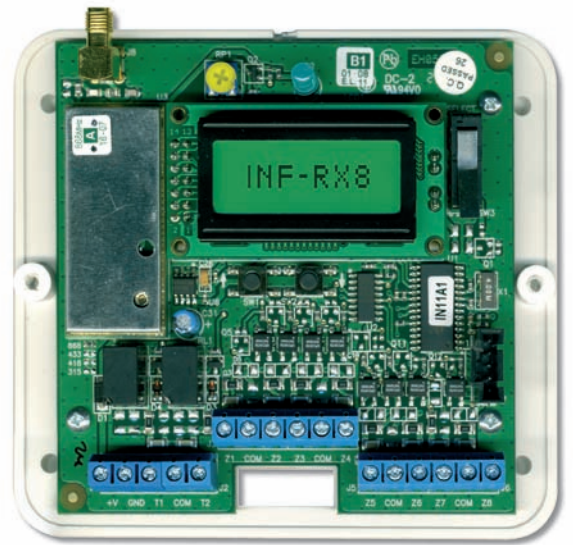

INF-PET



INF-PIR



INF-MFB



INF-PANIC



INF-MAG



INF-FLOOD



INF-P-CO



INF-P-SMOKE



INF-SHOCK



INF-GLASS



INF-UTX